

ASHP ENCLOSURE

VAAKAMET

EN


Air source heat pump enclosure for most common outdoor units for household use.
The enclosure can also be mounted on a ground stand using a separate mounting kit.



INSTALLATION INSTRUCTIONS:

Assemble the cover on a flat surface.

1. Attach the side panels to the front panel with screws (M5×16).
2. Install the mounting screws into the wall (screw spacing 1025 mm).
3. A ground stand and a rain deflector can also be connected to the enclosure; both are optional accessories sold separately.
4. When installing the cover, pay attention to the location of the outdoor unit's air outlet.
5. Lift the roof element on top of the cover and secure it with self-drilling screws.

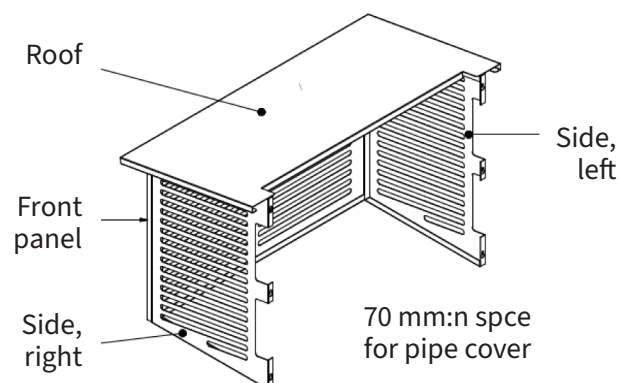

PAINTING INSTRUCTIONS:

- Powder-coated, standard colors:
White / RR20 / RAL9010
Gray / RR23 / RAL7024
Black / RR33 / RAL9005
Red / RR750
Special colors available upon request.
- Repainting only with solvent-based paints.
Check suitability with your paint retailer.

DIMENSIOIS (L × D × H):

- Internal: 1000 × 559 × 700–796 mm
- External: 1050 × 560 × 690–800 mm
- Roof: 1200 × 640 mm

For more information: info@kiilax.fi

INCLUDED MOUNTING KIT:

- 6 pcs cross-slot screws M5×16
- 6 pcs dome head screws 5.0×30
- 6 pcs nylon plugs 6.0×30
- 4 pcs roof screws 4.2×25 TX20

