

ENCLOSURE: ASHP MEDIUM

EN

VAAKAMETVMED

Air source heat pump enclosure for larger outdoor units.


The height of the cover can be extended with separately sold extension kits.



INSTALLATION INSTRUCTIONS:

Assemble the cover on a flat surface.

1. Attach the side panels to the front panel with screws (M5×16).
2. Install the mounting screws into the wall (screw spacing 1225 mm).
3. A ground stand and a rain deflector can also be connected to the enclosure; both are optional accessories sold separately.
4. When installing the cover, pay attention to the location of the outdoor unit's air outlet.
5. Lift the roof element on top of the cover and secure it with self-drilling screws.

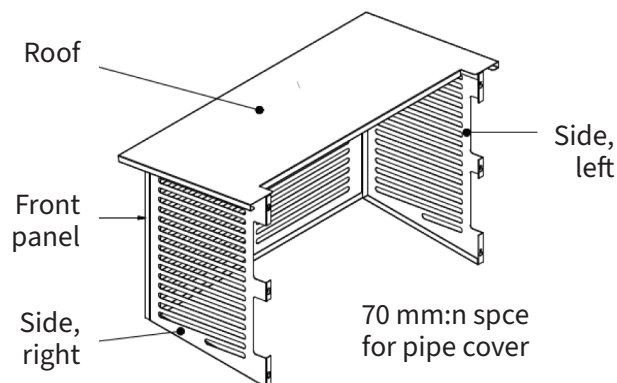



PAINTING INSTRUCTIONS:

- Powder-coated, white RR20 / RAL9010. Special colors available upon request.
- Overpainting should only be done with solvent-based paints. Check suitability with your paint retailer.

DIMENSIOIS (L × D × H):

- Internal: 1200 × 559 × 900–998 mm
- External: 1250 × 560 × 900–1000 mm
- Roof: 1400 × 650 mm
- The height can be extended with separately sold extension kits (VAAKAMETVMEDJATKO: 1250 × 350 × 560 mm).

For more information: info@kiilax.fi

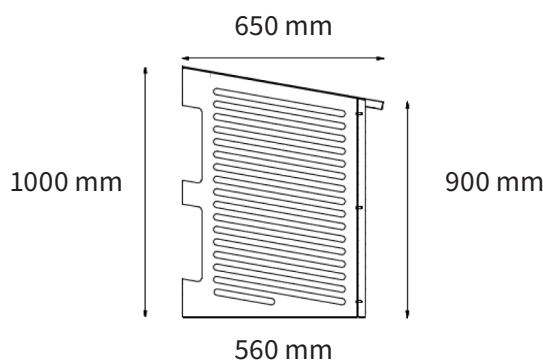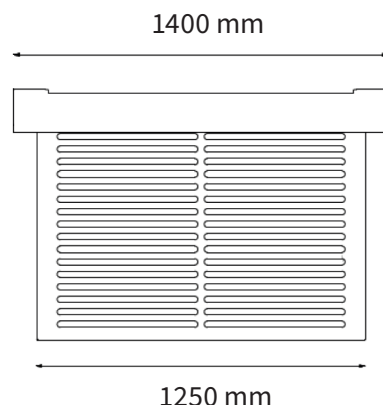

INCLUDED MOUNTING KIT:

- 6 pcs cross-slot screws M5×16
- 6 pcs dome head screws 5.0×30
- 6 pcs nylon plugs 6.0×30
- 4 pcs roof screws 4.2×25 TX20

KIILAX

Kiilax Oy
Levytie 1
80100 Joensuu
Finland

kiilax.fi
info@kiilax.fi
+358 104 194 816

